




CERALUX®  
Industries Inc.

*Leaders In Bathware*

## IMPORTANT

Read these instructions  
thoroughly before beginning  
work

Save this Manual For  
Future Reference

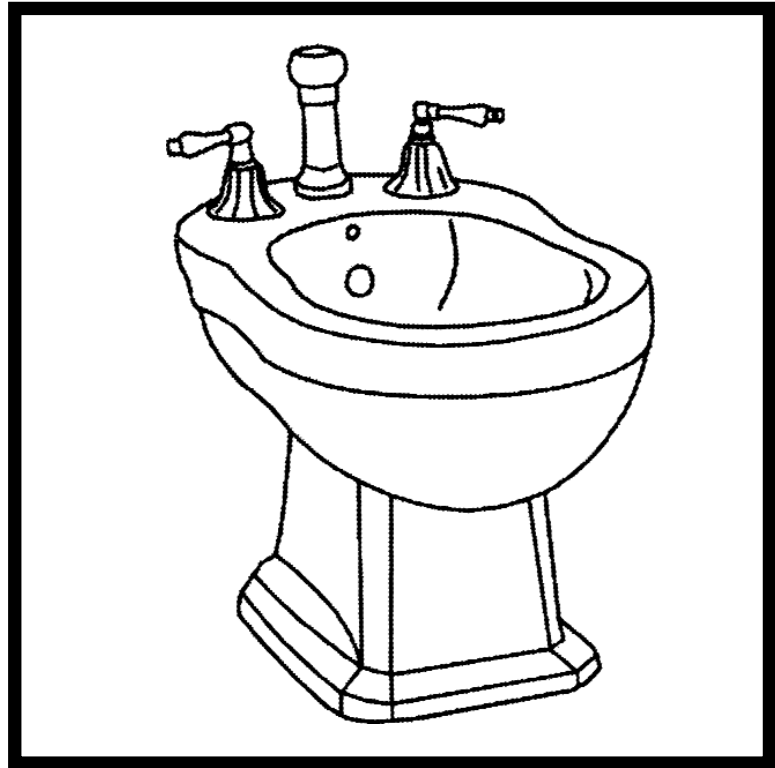

# BIDET GENERAL INSTALLATION INSTRUCTIONS




# GENERAL INSTALLATION INSTRUCTIONS FOR BIDET PAGE 1

## INSTALLING BIDET

1.

Install bidet faucet and drain according to manufacturer's installation instructions.

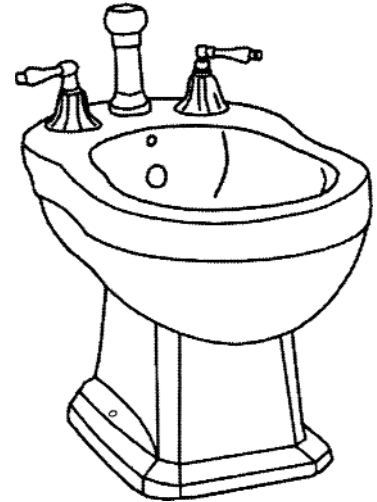

2.

Set the bidet on floor in its mounting location.

Trace an outline of bidet base, and mark location of the two side mounting holes.






# GENERAL INSTALLATION INSTRUCTIONS FOR BIDET PAGE 2

3.

Remove bidet from mounting location.

Drill two 3/16" diameter holes at the marked side mounting hole locations.

Thread floor bolts (included) into the mounting holes.

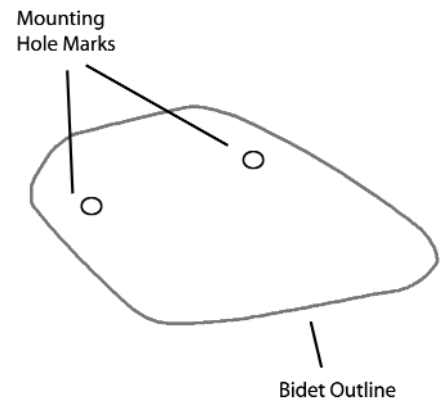

4.

Thread floor bolts (included) into the mounting holes.

Apply a bead of sealant around the base for the bidet, and carefully align the bidet inside the outline drawn on the floor.

Position the bidet in the mounting location so both floor bolts extend through the bidet side mounting holes.

Assemble the bolt caps bases, washers, and nuts. Hand tighten nuts, and then tighten them an additional 1/2 -turn with wrench.

**Caution:** Risk of personal injury or product damage. Vitreous china can chip or break easily if the nuts are overtighten or the product is handled carelessly.

If floor bolts extend more than 1/4" from the top of nut, loosen nut and turn bolt further into the floor. Retighten nuts, and install bolt caps.

Then connect the water supplies and drain.

Turn on the hot and cold shut-off valves. Check entire installation for leaks. Repair as required

Check all connections for leaks for several days.

