




CERALUX®
Industries Inc.

Leaders In Bathware

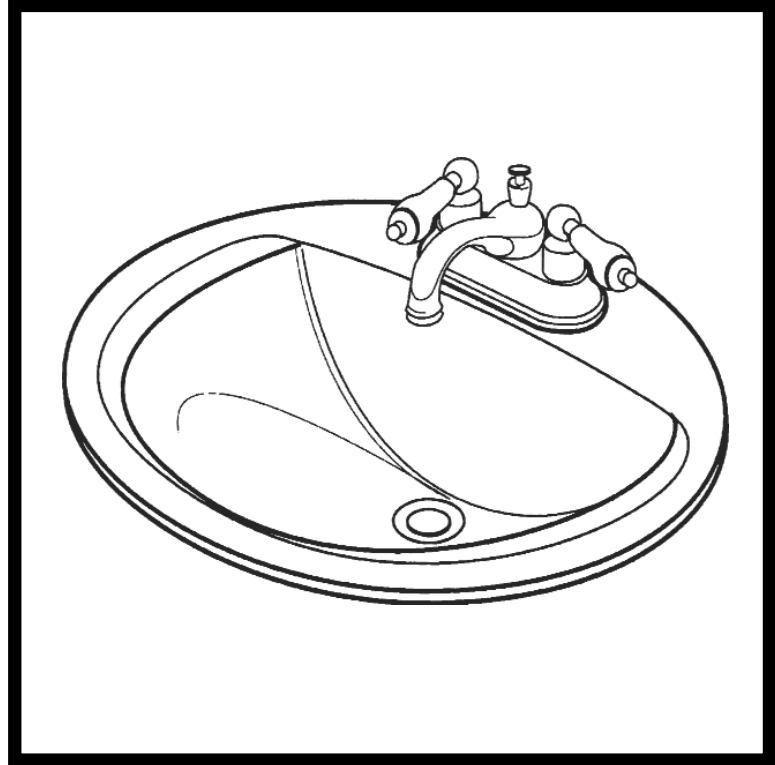

IMPORTANT

Read these instructions
thoroughly before beginning
work

Save this Manual For
Future Reference

DROP-IN LAVATORIES GENERAL INSTALLATION INSTRUCTIONS




GENERAL INSTALLATION INSTRUCTIONS FOR DROP-IN LAVATORIES PAGE 1

INSTALLING DROP-IN

1.



If making a cutout is necessary, locate the position of the lavatory. Provide proper clearance under the counter top for the faucet supply lines, drain assembly and the structural parts of the cabinet. Turn upside down and trace perimeter of lavatory.

NOTE: If replacing an existing lavatory be certain to shut off water supply before removing old lavatory.

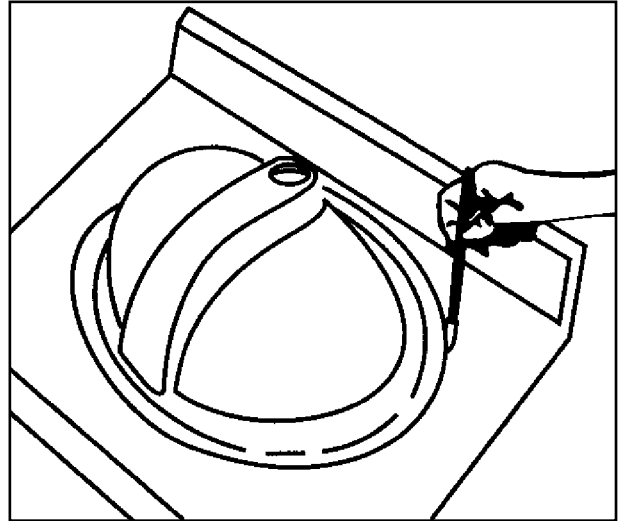

2.a.

Drill a clearance hole 1/2" inside the perimeter line of the lavatory.

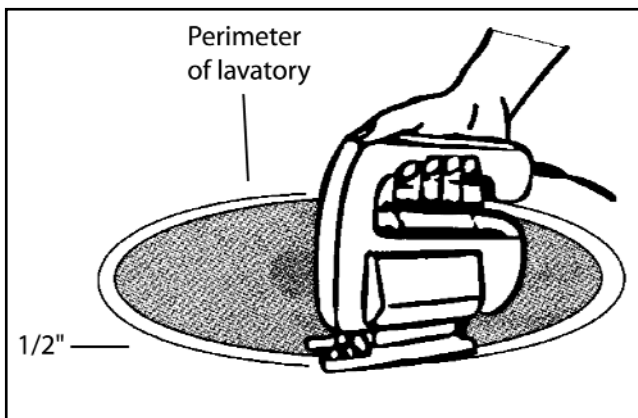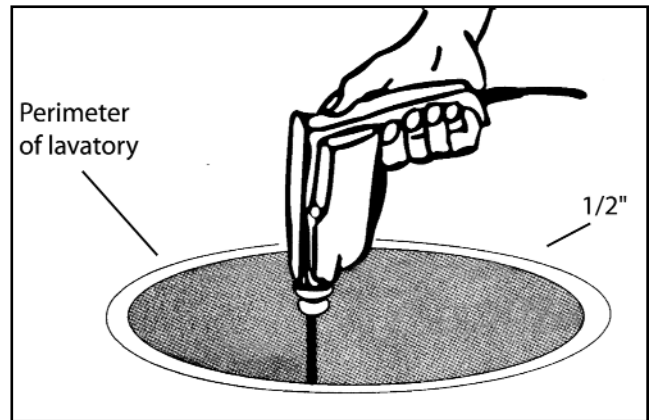

2.b.



Cut opening 1/2" inside the perimeter of lavatory.



GENERAL INSTALLATION INSTRUCTIONS FOR DROP-IN LAVATORIES PAGE 2

3.

Mount the faucet and drain assembly (not included) on the lavatory following faucet manufacturer instructions. Be certain to apply a head of sealing putty on the underside of the drain (Part "A") in order to ensure a watertight seal between the lavatory and drain. Remove the excess putty after the installation drain on lavatory.

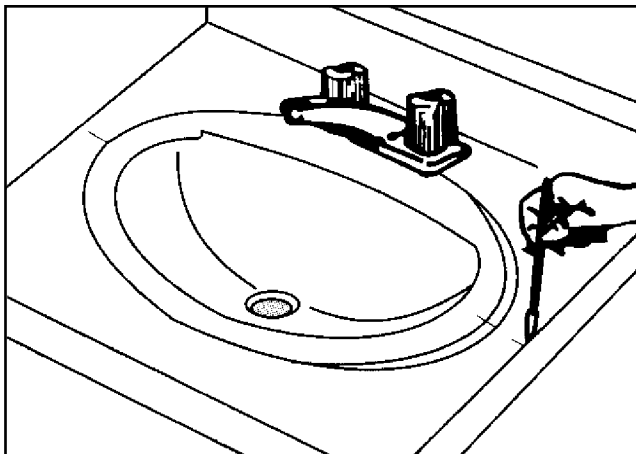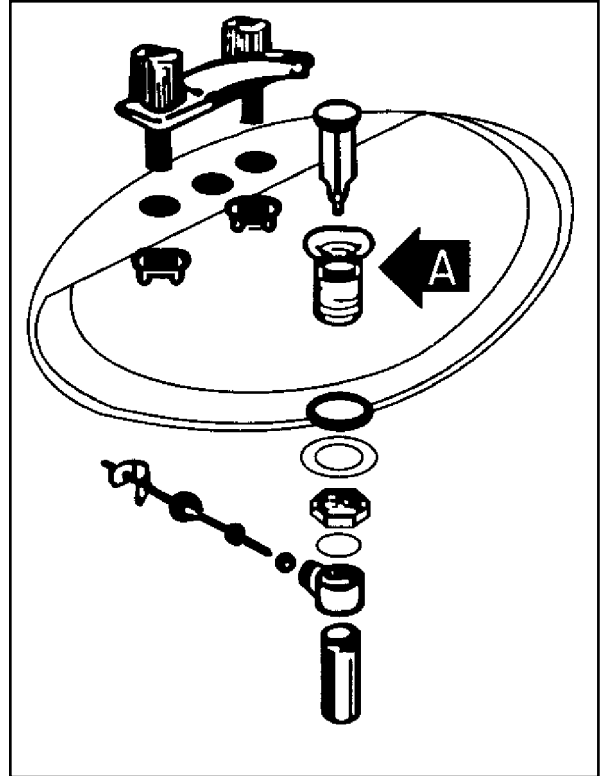

4.



Before applying the sealant, place the lavatory temporarily into the cut-out. Check for alignment and clearance. Then mark the lavatory and countertop in several places as a guide for the installation location.



GENERAL INSTALLATION INSTRUCTIONS FOR DROP-IN LAVATORIES PAGE 3


5.

After checking fit and alignment, turn lavatory upside down and apply a generous portion of sealant around the underside of the rim near the edge. Carefully Lower lavatory in place, along with marks made earlier, and press down firmly. Allow sealant to set before connecting supplies and drain.

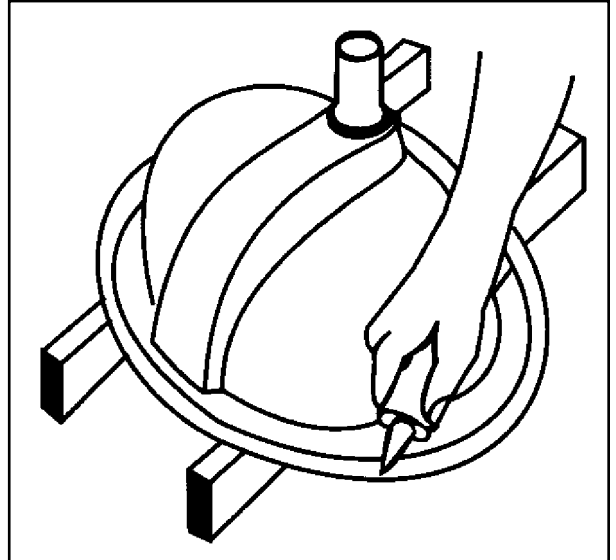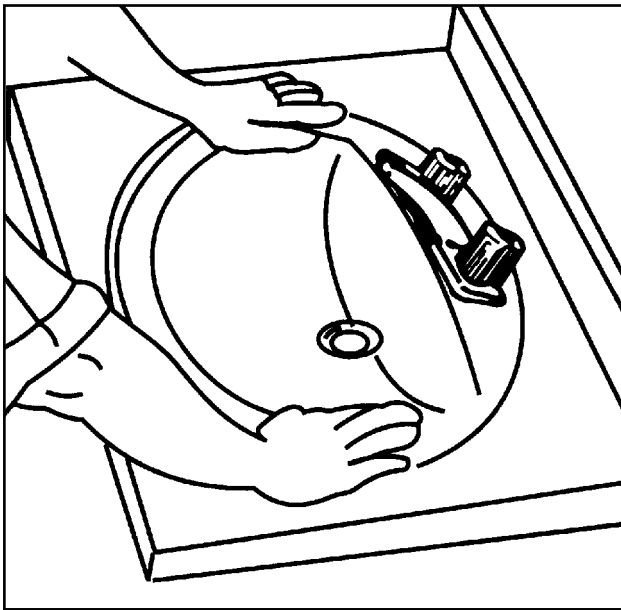


6.

Connect supply line to faucet (finger tight) and carefully bend tubes to engage with supply shut-off valves. Tighten connections at faucet and shut-off valves for secure seat.

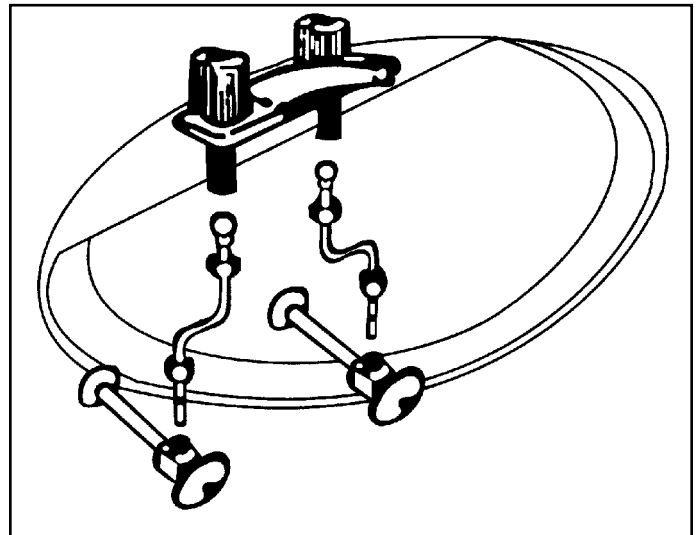



GENERAL INSTALLATION INSTRUCTIONS FOR DROP-IN LAVATORIES PAGE 4

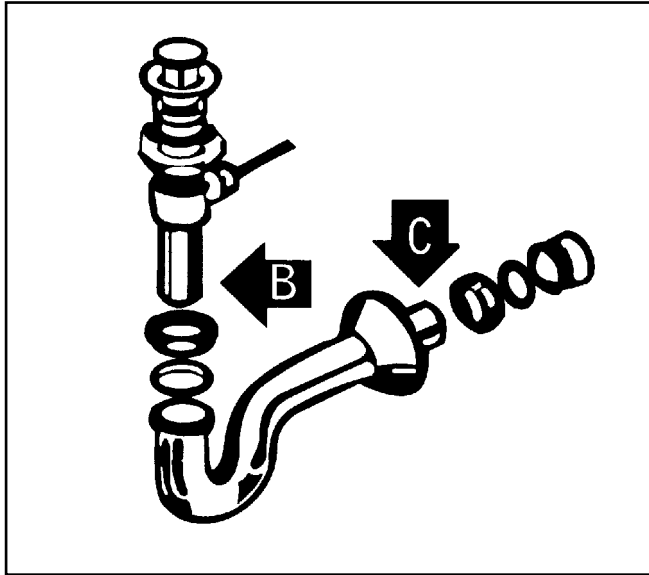

7.

Connect trap to drain assembly hand tight to check alignment. It may be necessary to cut off part of the tailpiece (area "B") or part of the horizontal leg of the trap (area "C"). Secure joints for watertight assembly.

CARE AND MAINTENANCE INSTRUCTIONS

Your new lavatory provides you with years of service. Cleaning should be done on a regular basis. Use of scouring cleanser may remove the glaze on the basin and are not recommended. Wipe all outside surfaces with a soapy water solution and clean basin area with a non-abrasive type cleaner. Use of cleaners containing chlorine will cause damage and are not recommended.